


Specifications Sheet

Directional Coupler

Model: C-30NF / C-40NF

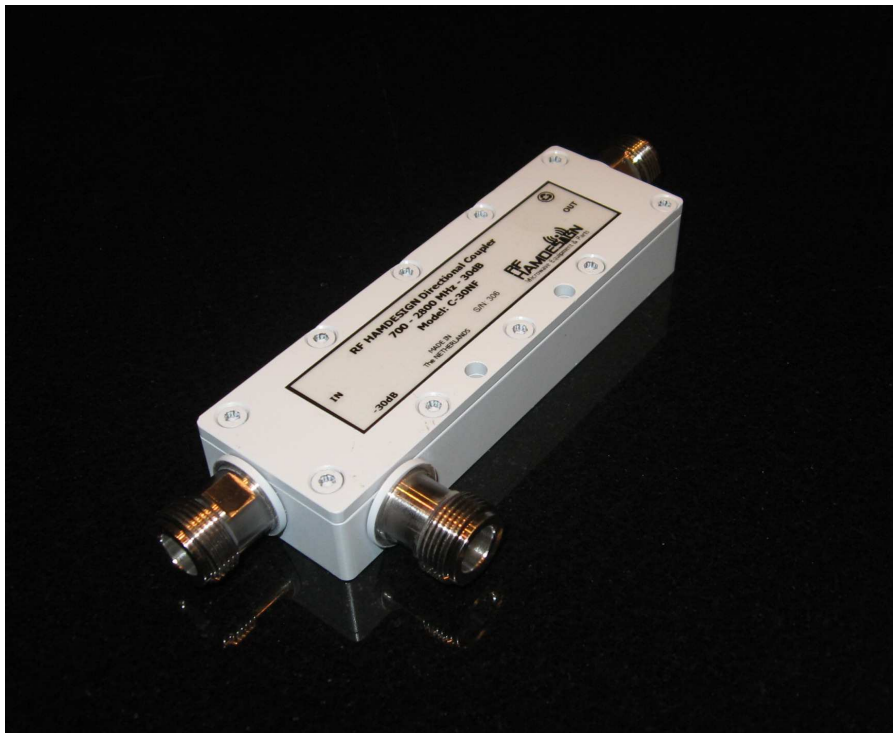

Model	C-30NF	C-40NF
Frequency range	700-2800 MHz	700-2800 MHz
Output Port coupling	Flat 30dB	Flat 40dB
Calibration accuracy	0,15dB	0,15dB
RF Power Max.	1000 Watts	1000Watts
Insertion loss	<0.2dB @ 2320MHz	<0.2dB @ 2320MHz
Directivity	>15dB	>15dB
Impedance	50 ohm	50 ohm
VSWR	<1.25	1.25
Input / output	N-Connector female	N-Connector female
Output coupling	N-Connector female	N-Connector female
Dimensions: (L*W*H*)	150*55*20mm	150*55*20mm
Weight	230 Gram	230 Gram
Temperature (Celcius)	-30 / +65 degree	-30 / +65 degree

Dimensions Directional Coupler Model C-30NF & C-40NF

